



Flexi-strip 380-400MHz Tetra Antenna

EF-S1-3F

Electrical Data

Frequency Range (MHz)	380 - 400
Bandwidth @ 1.5:1 VSWR	10%
Gain: Isotropic	2dBi
Compared with ¼ wave	0dB
Polarisation	Vertical
Configuration	Printed ½ Wave Dipole
Orientation	Vertical, Cable Entry From Left or Right

Mechanical Data


Dimensions (mm)	Length	217
	Width	19
	Thickness	2.5
	Cable Entry Thickness	6.5
Weight (g)		
Operating Temp (°C)		-40° / +80°C
Material		Engineering Plastic
Colour		Black

Mounting Data


Fixing	Internal Glassmount
Material	Acrylic Adhesive Pad
Colour	Black

Cable Data

Type	SR35 Coax
Thickness (mm)	3.5
Length (m)	3
Termination	FME

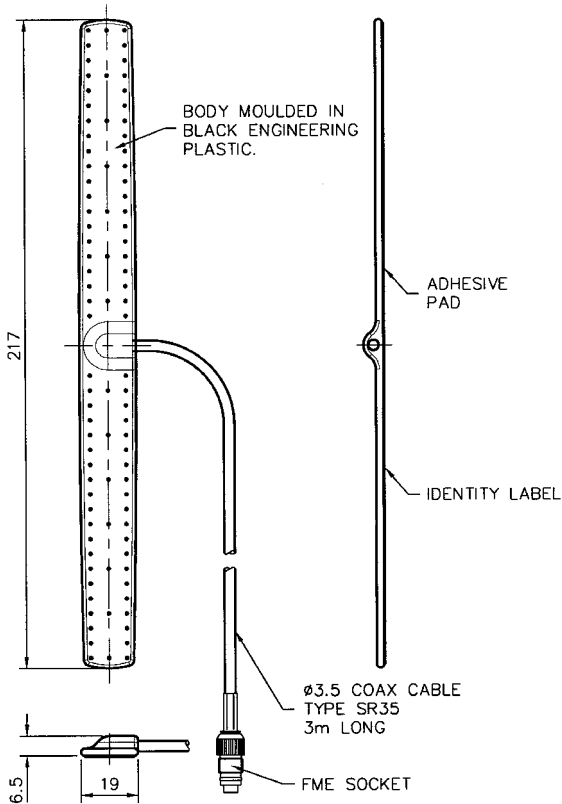

390 MHz

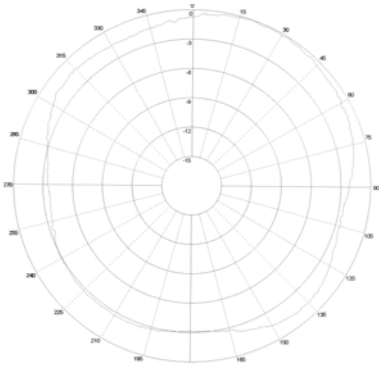

VSWR v Freq (MHz) S1

