

Datasheet

1 / 2

E60-300F 0 dB (M6)


Flexible full $1/4\lambda$ spring loaded customer tunable antenna whip

Flexible spring loaded customer tunable antenna whip especially made for use with SX-Mount and Multimag on vehicle roof etc.

- CUSTOMER TUNABLE (BY CUTTING)
- [CUTTING TABLE](#) FOR TUNING SUPPLIED

ELECTRICAL SPECIFICATIONS

Frequency	60 - 300 MHz (4M-BAND)
Bandwidth	20 MHz
Impedance	50 ohm
Vswr	<2.0
Gain	0 dBd, 2.1 dBi
Polarisation	Vertical
Max. Input Power	100 W

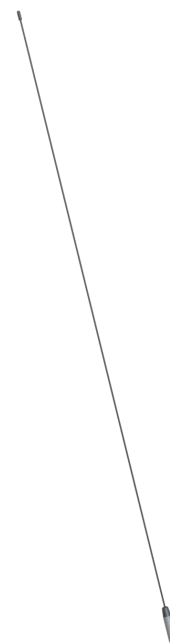

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 1295 mm (Before cutting)
Weight	115 g
Mounting	On "E"-type mounts
Mounting Place	Vehicle roof
Mounting Instruction	Antenna must be cut to specified frequency. Cutting Table included
Materials	Stainless steel, PE and brass
Operating Temperature	-40C to +70C
Connector	M6 Internal thread

Datasheet

2 / 2

ORDERING INFORMATION

P/N	E12208
P/N	E12208IP (Bulk packing)

PACKAGING INFORMATION

Type	Polybag or bulk
------	-----------------

